




PS501-3

Preset Torque Screwdriver with Window Scale and ESD Safe 15 cN.m-170 cN.m





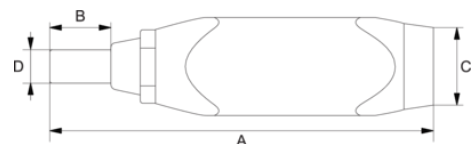

PRODUCT DETAILS

- Range covering between 4 cN.m and 450 cN.m torque values
- Torque measurement clockwise only, can be used to loosen fasteners without affecting the internal mechanism
- Clicking system triggers a tactile and audible signal
- 1/4" hex non-magnetic spring-loaded bit holder to avoid damaging sensitive equipment or components in electronic applications
- All-metal 3-lobe handle
- Accurate to $\pm 6\%$ CW
- Cam-over torque limiting clutch for repeatability and accuracy
- Non-magnetic spring loaded bit holder to avoid damaging sensitive equipment or components in electronic applications (1/4" 6.3 DIN 3126, ISO 1174)
- An adapter makes it possible to use 1/4" sockets (1/4" 6.3 DIN 3120, ISO 1174)
- The desired torque value is easily set using an internal adjustment screw accessible by removing the end cap of the handle
- Supplied in an adjustable semi-transparent square tube
- On request preset screwdrivers can be set and certified with a declaration of conformity in compliance with international standards
- Standards: DIN/ISO 6789 EN 26789/1994
- Standards: ISO 6789/IEC61340-5-1
- ESD safe (IEC 61340-5-1)
- Made in USA



PRODUCT ATTRIBUTES

Product: **PS501-3**

| | | | | | |
|---|------------|---|---------------|---|----------|
|  | 15-170 cNM |  | 21-240 ozf.in |  | 1/4 in |
| A | 141 mm | A | 5.55 in | B | 18.2 mm |
| B | 0.72 in | C | 28 mm | C | 1.10 in |
| D | 9.6 mm | D | 0.38 in |  | 0.198 kg |