




**8152**

**Ultra-Flush® Precision Cut  
Diagonal Cutter with Oval Head &  
ESD Safe Handle 0.1-1.25 mm**







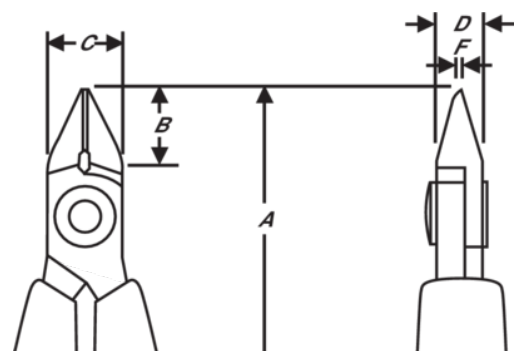



**PRODUCT DETAILS**

- 80 Series precision diagonal and stripping cutter
- ESD safe mono-material handles with return spring
- Micro-bevel cut
- The cutting capacity given is for copper wire
- Suitable for cutting Cu
- High performance alloyed steel
- Burnished finish
- Numerically controlled machine grinding guarantees edge angle accuracy & contact, increases the tools reliability & consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint that minimizes friction & maximizes alignment of cutting edges
- Ideal for wire harness work & standard printed circuit board assembly
- Also valid for stripping



PRODUCT ATTRIBUTES

Product: **8152**

|   |             |   |              |   |              |
|---|-------------|---|--------------|---|--------------|
|  | Oval        |  | M            |  | Ultra-Flush® |
|  | 0.1-1.25 mm |  | 0.00-0.05 in |  |              |
|  |             | <b>A</b>  | 112.5 mm     | <b>A</b>  | 4.43 in      |
| <b>B</b>  | 13 mm       | <b>B</b>  | 0.51 in      | <b>C</b>  | 12.5 mm      |
| <b>C</b>  | 0.50 in     | <b>D</b>  | 6 mm         | <b>D</b>  | 0.24 inch    |
| <b>F</b>  | 1.2 mm      | <b>F</b>  | 0.05 in      |  | 73 g         |
| <b>Ω</b>  | Dissipative |   |              |   |              |