




HS 8136-HS 8168

Long Precision Diagonal Cutters with Tapered & Relieved Head & ESD Safe Handle



PRODUCT DETAILS

- HS series precision diagonal cutters with tapered & relieved head
- ESD safe long foam handles with return spring
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Suitable for cutting copper
- High performance alloy steel
- Burnished finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- Ideal for wire harness work and standard printed circuit board assembly

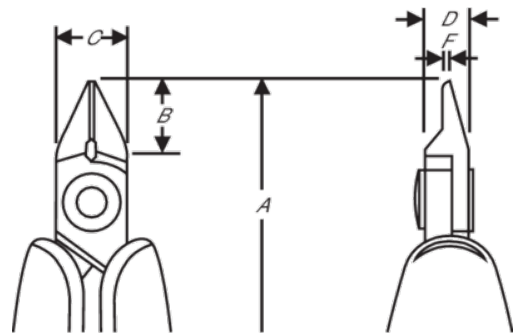

PRODUCT ATTRIBUTES

Product: **HS8136**

	Tapered & Relieved		XS		Micro-Bevel®
	0.1-0.8 mm		0.004-0.03 in		140.3 mm
	5.52 in		8 mm		0.31 in
	8 mm		0.31 in		5 mm
	0.2 inch		0.8 mm		0.03 in
	91 g		Dissipative		

Product: **HS8137**

	Tapered & Relieved		XS		Flush
	0.1-0.8 mm		0.004-0.03 in		140.3 mm
	5.52 in		8 mm		0.31 in
	8 mm		0.31 in		5 mm
	0.2 inch		0.8 mm		0.03 in
	91 g		Dissipative		

Product: **HS8138**

	Tapered & Relieved		XS		Ultra-Flush®
	0.1-0.5 mm		0.004-0.02 in		140.3 mm
	5.52 in		8 mm		0.31 in
	8 mm		0.31 in		5 mm
	0.2 inch		0.8 mm		0.03 in
	91 g		Dissipative		

Product: **HS8146**

	Tapered & Relieved		S		Micro-Bevel®
	0.2-1.0 mm		0.01-0.04 in		5.60 mm
	142.3 in		10 mm		0.39 in
	10 mm		0.39 in		6 mm
	0.24 inch		0.8 mm		0.03 in
	91 g		Dissipative		

Product: **HS8147**

	Tapered & Relieved		S		Flush
	0.1-1.0 mm		0.01-0.04 in		5.60 mm
	142.3 in		10 mm		0.39 in
	10 mm		0.39 in		6 mm
	0.24 inch		0.8 mm		0.03 in
	91 g		Dissipative		

Product: **HS 8148**

	Tapered & Relieved		S		Ultra-Flush®
	0.1-0.8 mm		0.01-0.03 in		5.60 mm
	142.3 in		10 mm		0.39 in
	10 mm		0.39 in		6 mm
	0.24 inch		0.8 mm		0.03 in
	90 g		Dissipative		

Product: **HS8156**

	Tapered & Relieved		M		Micro-Bevel®
	0.3-1.25 mm		0.01-0.05 in		144.8 mm
	5.70 in		12.5 mm		0.5 in
	12.5 mm		0.49 in		6 mm
	0.24 inch		1 mm		0.04 in
	97 g		Dissipative		

Product: **HS8157**

	Tapered & Relieved		M		Flush
	0.2-1.25 mm		0.01-0.05 in		144.8 mm
	5.70 in		12.5 mm		0.5 in
	12.5 mm		0.49 in		6 mm
	0.24 inch		1 mm		0.04 in
	97 g		Dissipative		

Product: **HS8158**

	Tapered & Relieved		M		Ultra-Flush®
	0.2-1.0 mm		0.01-0.04 in		144.8 mm
	5.70 in		12.5 mm		0.5 in
	12.5 mm		0.49 in		6 mm
	0.24 inch		1 mm		0.04 in
	97 g		Dissipative		

Product: **HS8166**

	Tapered & Relieved		L		Micro-Bevel®
	0.4-1.5 mm		0.02-0.06 in		125 mm
	4.92 in		16 mm		0.63 in
	16 mm		0.63 in		8 mm
	0.31 inch		1.6 mm		0.06 in
	139 g		Dissipative		

Product: **HS8167**

	Tapered & Relieved		L		Flush
	0.3-1.5 mm		0.01-0.06 in		125 mm
	4.92 in		16 mm		0.63 in
	16 mm		0.63 in		8 mm
	0.31 inch		1.6 mm		0.06 in
	139 g		Dissipative		

Product: **HS8168**

	Tapered & Relieved		L		Ultra-Flush®
	0.3-1.25 mm		0.01-0.05 in		125 mm
	4.92 in		16 mm		0.63 in
	16 mm		0.63 in		8 mm
	0.31 inch		1.6 mm		0.06 in
	139 g		Dissipative		