




RX 8132

**ERGO™ Ultra-Flush® Precision
Cut Diagonal Cutter with Oval
Head 0.1-0.8 mm**







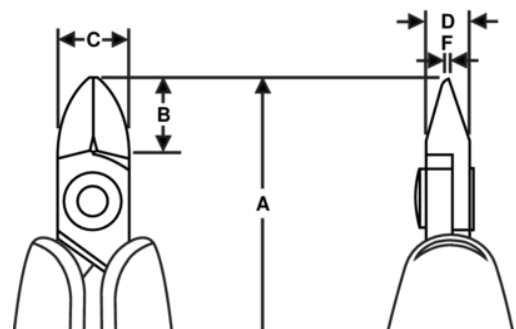



PRODUCT DETAILS

- Precision oval head diagonal cutters developed according to the scientific ERGO™ process, Oval head
- ERGO™ handles with two-component combination, thermoplastic surface, for comfortable grip, on tough polypropylene core for rigidity
- Micro-bevel, flush & ultra-cut
- The cutting capacity that is given is for copper wire
- Cutting capacity: 0.1 mm-0.8 mm to 0.4 mm-2 mm
- High performance alloyed steel
- Burnished finish
- Numerically controlled machine grinding guarantees edge angle accuracy & contact, increases the tool's reliability & consistency
- Precision induction-hardened edges 63-65 HRC
- Screw joint minimises friction & maximises alignment of cutting edges
- ESD safe handles in two-component synthetic material
- Bio spring limits the tension throughout the working cycle of the tool & can be adjusted to 3 different positions or removed
- Ideal for wire harness work & standard printed circuit board assembly



PRODUCT ATTRIBUTES

Product: **RX 8132**

| | | | | | |
|---|-------------|---|--------------|---|---------------|
|  | Oval |  | XS |  | Ultra-Flush ® |
|  | 0.1-0.8 mm |  | 0.00-0.03 in |  | |
|  | | A | 133.5 mm | A | 5.25 in |
| B | 8.5 mm | B | 0.33 in | C | 8 mm |
| C | 0.31 in | D | 5 mm | D | 0.2 inch |
| F | 0.8 mm | F | 0.03 in |  | 68 g |
| Ω | Dissipative | | | | |