




RX 8153

ERGO™ Micro-Bevel® Precision Cut Diagonal Cutter with Tapered Head 0.3-1.5 mm







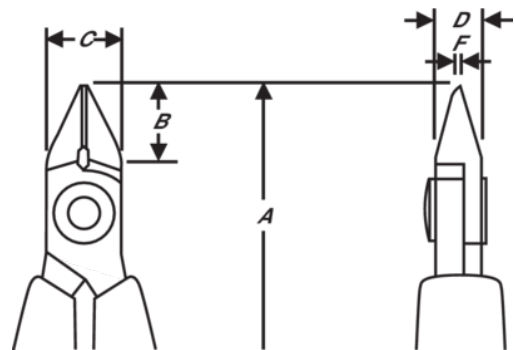



PRODUCT DETAILS

- Precision Tapered Head diagonal cutters developed according to the scientific ERGO™ process, Tapered Head
- ERGO™ handles with two-component combination and thermoplastic surface for comfortable grip, on tough polypropylene core for rigidity
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Cutting capacity: 0.1-0.8 mm to 0.2-1.25 mm
- High performance alloy steel
- Burnished finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction-hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- ESD safe handles in two-component synthetic material
- Bio spring limits tension through the working cycle of the tool and can be adjusted to 3 different positions or removed
- Ideal for assembly work where accessibility is a consideration



PRODUCT ATTRIBUTES

Product: **RX 8153**

| | | | | | |
|---|--------------|---|--------------|---|--------------|
|  | Tapered |  | M |  | Micro-Bevel® |
|  | 0.3-1.6 mm |  | 0.01-0.06 in |  | 0.2-0.6 mm |
|  | 0.01-0.02 in | A | 138 mm | A | 5.30 in |
| B | 13 mm | B | 0.51 in | C | 12.5 mm |
| C | 0.49 in | D | 6 mm | D | 0.24 inch |
| F | 1.2 mm | F | 0.05 in |  | 71 g |
| Ω | Dissipative | | | | |