




RX 8149 ERGO™ Precision Diagonal Tip Cutters







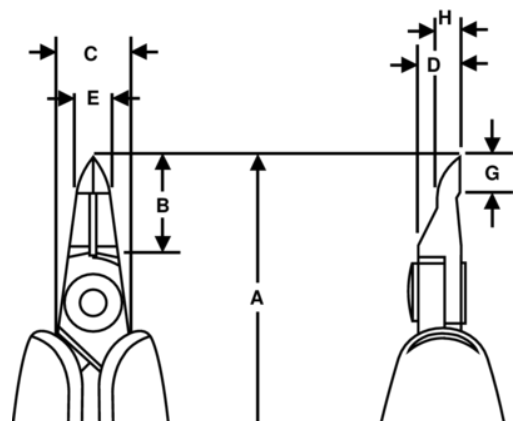

PRODUCT DETAILS

- Precision tip cutters developed according to the scientific ERGO™ process
- ERGO™ handles with two-component combination, thermoplastic surface, for comfortable grip, on tough polypropylene core for rigidity
- Flush cut
- The cutting capacity that is given is for copper wire
- Cutting capacity: 0.1 mm to 0.6 mm
- High performance alloyed steel
- Burnished finish
- Numerically controlled machine grinding guarantees edge angle accuracy & contact, increases the tool's reliability & consistency
- Precision induction-hardened edges 58-60 HRC
- Screw joint minimises friction & maximises alignment of cutting edges
- ESD safe handles in two-component synthetic material
- Bio spring limits the tension throughout the working cycle of the tool & can be adjusted to 3 different positions or removed
- Ideal for use with multi-lead components & for rework



PRODUCT ATTRIBUTES

Product: **RX 8149**

| | | | | | |
|---|------------|---|--------------|---|-------------|
|  | Tip Cutter |  | S |  | Flush |
|  | 0.1-0.6 mm |  | 0.01-0.02 in | A | 139 mm |
| A | 5.47 in | B | 14 mm | B | 0.55 in |
| C | 10 mm | C | 0.39 in | D | 6 mm |
| D | 0.24 inch | E | 5 mm | E | 0.2 in |
| G | 5 mm | G | 0.2 in | H | 3.2 mm |
| H | 0.13 in |  | 70 g | Ω | Dissipative |