




**8155**

**Ultra-Flush® Precision Cut  
Diagonal Cutter with Tapered  
Head & ESD Safe Handle 0.2-1.25  
mm**







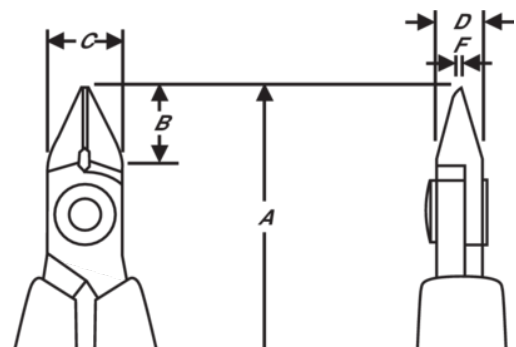



**PRODUCT DETAILS**

- 80 series precision diagonal cutters with tapered head
- ESD safe mono-material handles with return spring
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Suitable for cutting copper
- High performance alloy steel
- Burnished finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- Ideal for assembly work where accessibility is a consideration
- CO standard handle shape in conductive material



PRODUCT ATTRIBUTES

Product: **8155**

|   |             |   |              |   |              |
|---|-------------|---|--------------|---|--------------|
|  | Tapered     |  | M            |  | Ultra-Flush® |
|  | 0.2-1.25 mm |  | 0.01-0.05 in |  |              |
|  |             | <b>A</b>  | 112.5 mm     | <b>A</b>  | 4.43 in      |
| <b>B</b>  | 13 mm       | <b>B</b>  | 0.51 in      | <b>C</b>  | 12.5 mm      |
| <b>C</b>  | 0.50 in     | <b>D</b>  | 6 mm         | <b>D</b>  | 0.24 inch    |
| <b>F</b>  | 1.2 mm      | <b>F</b>  | 0.05 in      |  | 49 g         |
| <b>Ω</b>  | Dissipative |   |              |   |              |