




## PS501

### Pre-Set Torque Screwdrivers with Window Scale and ESD Safe





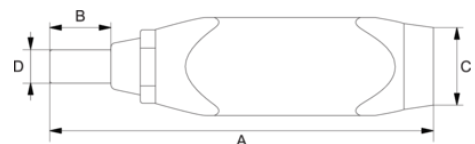

#### PRODUCT DETAILS

- Range covering between 4 cN.m and 450 cN.m torque values
- Torque measurement clockwise only, can be used to loosen fasteners without affecting the internal mechanism
- Clicking system triggers a tactile and audible signal
- 1/4" hex non-magnetic spring-loaded bit holder to avoid damaging sensitive equipment or components in electronic applications
- All-metal 3-lobe handle
- Accurate to  $\pm 6\%$  CW
- Cam-over torque limiting clutch for repeatability and accuracy
- Non-magnetic spring loaded bit holder to avoid damaging sensitive equipment or components in electronic applications (1/4" 6.3 DIN 3126, ISO 1174)
- An adapter makes it possible to use 1/4" sockets (1/4" 6.3 DIN 3120, ISO 1174)
- The desired torque value is easily set using an internal adjustment screw accessible by removing the end cap of the handle
- Supplied in an adjustable semi-transparent square tube
- On request preset screwdrivers can be set and certified with a declaration of conformity in compliance with international standards
- Standards: DIN/ISO 6789 EN 26789/1994
- Standards: ISO 6789/IEC61340-5-1
- ESD safe (IEC 61340-5-1)
- Made in USA







PRODUCT ATTRIBUTES





Product: **PS501-1**

	4-22 cNM		6-32 ozf.in		1/4 in
<b>A</b>	115 mm	<b>A</b>	4.53 in	<b>B</b>	18.2 mm
<b>B</b>	0.72 in	<b>C</b>	28 mm	<b>C</b>	1.10 in
<b>D</b>	9.6 mm	<b>D</b>	0.38 in		0.147 kg





Product: **PS501-2**

	7-70 cNM		10-100 ozf.in		1/4 in
<b>A</b>	141 mm	<b>A</b>	5.55 in	<b>B</b>	18.2 mm
<b>B</b>	0.72 in	<b>C</b>	28 mm	<b>C</b>	1.10 in
<b>D</b>	9.6 mm	<b>D</b>	0.38 in		0.200 kg

Product: **PS501-3**

	15-170 cNM		21-240 ozf.in		1/4 in
<b>A</b>	141 mm	<b>A</b>	5.55 in	<b>B</b>	18.2 mm
<b>B</b>	0.72 in	<b>C</b>	28 mm	<b>C</b>	1.10 in
<b>D</b>	9.6 mm	<b>D</b>	0.38 in		0.198 kg

Product: **PS501-4**

	45-450 cNM		64-637 ozf.in		1/4 in
<b>A</b>	154 mm	<b>A</b>	6.06 in	<b>B</b>	18.2 mm
<b>B</b>	0.72 in	<b>C</b>	32 mm	<b>C</b>	1.26 in
<b>D</b>	9.6 mm	<b>D</b>	0.38 in		0.270 kg