




8145

**Ultra-Flush® Precision Cut  
Diagonal Cutter with Tapered  
Head & ESD Safe Handle 0.1-1 mm**







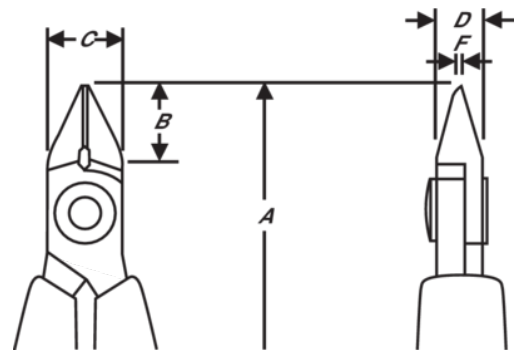



PRODUCT DETAILS

- Ideal for assembly work where accessibility is a consideration
- Material: High performance alloy steel
- Exacting induction hardened edges 63–65 HRC
- ESD safe handles in synthetic material with leaf springs
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire



PRODUCT ATTRIBUTES

Product: **8145**

|   |             |   |              |   |              |
|---|-------------|---|--------------|---|--------------|
|  | Tapered     |  | S            |  | Ultra-Flush® |
|  | 0.1-1.0 mm  |  | 0.00-0.04 in |  |              |
|  |             | <b>A</b>  | 110 mm       | <b>A</b>  | 4.33 in      |
| <b>B</b>  | 10.5 mm     | <b>B</b>  | 0.41 in      | <b>C</b>  | 8 mm         |
| <b>C</b>  | 0.39 in     | <b>D</b>  | 6 mm         | <b>D</b>  | 0.24 inch    |
| <b>F</b>  | 0.8 mm      | <b>F</b>  | 0.03 in      |  | 46 g         |
| <b>Ω</b>  | Dissipative |   |              |   |              |