




8164
Flush Precision Cut Diagonal
Cutter with Tapered Head & ESD
Safe Handle 0.3-2 mm





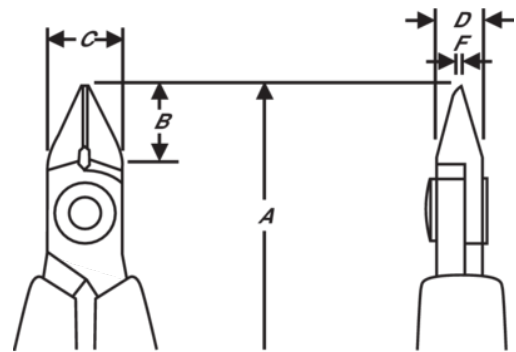





PRODUCT DETAILS

- Ideal for assembly work where accessibility is a consideration
- Material: High performance alloy steel
- Exacting induction hardened edges 63–65 HRC
- ESD safe handles in synthetic material with leaf springs
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire



PRODUCT ATTRIBUTES

Product: **8164**

	Tapered		L		Flush
	0.3-2.0 mm		0.01-0.08 in		0.3-0.6 mm
	0.01-0.02 in	A	125 mm	A	4.92 in
B	16 mm	B	0.63 in	C	16 mm
C	0.63 in	D	8 mm	D	0.31 inch
F	1.6 mm	F	0.06 in		88 g
Ω	Dissipative				