




**8149**

**Precision Diagonal Tip Cutter  
with ESD Safe Handle 0.1-0.6  
mm**



PRODUCT DETAILS

- Material: High performance alloy steel
- Exacting induction hardened edges 63–65 HRC
- ESD safe handles in synthetic material with leaf springs
- Precision screw joint that minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire

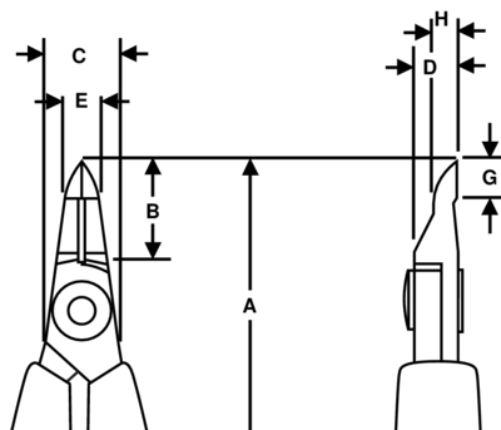

PRODUCT ATTRIBUTES

Product: **8149**

|                                                                                   |            |                                                                                   |              |                                                                                   |             |
|-----------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|-------------|
|  | Tip Cutter |  | S            |  | Flush       |
|  | 0.1-0.6 mm |  | 0.00-0.02 in | <b>A</b>                                                                          | 114 mm      |
| <b>A</b>                                                                          | 4.49 in    | <b>B</b>                                                                          | 14 mm        | <b>B</b>                                                                          | 0.55 in     |
| <b>C</b>                                                                          | 5 mm       | <b>C</b>                                                                          | 0.23 in      | <b>D</b>                                                                          | 6 mm        |
| <b>D</b>                                                                          | 0.24 inch  | <b>E</b>                                                                          | 5 mm         | <b>E</b>                                                                          | 0.23 in     |
| <b>G</b>                                                                          | 5 mm       | <b>G</b>                                                                          | 0.23 in      | <b>H</b>                                                                          | 3.2 mm      |
| <b>H</b>                                                                          | 0.13 in    |  | 48 g         | <b>Ω</b>                                                                          | Dissipative |