




**7190**

**Micro-Bevel® Cut Diagonal  
Cutter with Tapered Head & ESD  
Safe Handle 0.2 mm-1 mm**



**PRODUCT DETAILS**

- Ideal for assembly work where access is a consideration
- Material: High performance alloy steel
- Polished and precision induction hardened to 63–65 HRC
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- ESD safe handles in synthetic material with leaf springs
- Cutting capacity is listed for solid copper wire

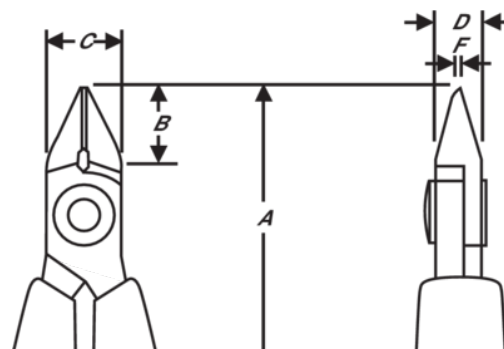

PRODUCT ATTRIBUTES

Product: 7190

|                                                                                   |            |                                                                                   |              |                                                                                   |               |
|-----------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|---------------|
|  | Tapered    |  | XS           |  | Micro-Bevel ® |
|  | 0.2-1.0 mm |  | 0.00-0.04 in | <b>A</b>                                                                          | 108 mm        |
| <b>A</b>                                                                          | 4.29 in    | <b>B</b>                                                                          | 9 mm         | <b>B</b>                                                                          | 0.35 in       |
| <b>C</b>                                                                          | 9 mm       | <b>C</b>                                                                          | 0.35 in      | <b>D</b>                                                                          | 6 mm          |
| <b>D</b>                                                                          | 0.24 inch  | <b>F</b>                                                                          | 1 mm         | <b>F</b>                                                                          | 0.04 in       |
|  | 50 g       | <b>Ω</b>                                                                          | Dissipative  |                                                                                   |               |