




7190

**Micro-Bevel® Cut Diagonal Cutter
with Tapered Head & ESD Safe
Handle 0.2 mm-1 mm**







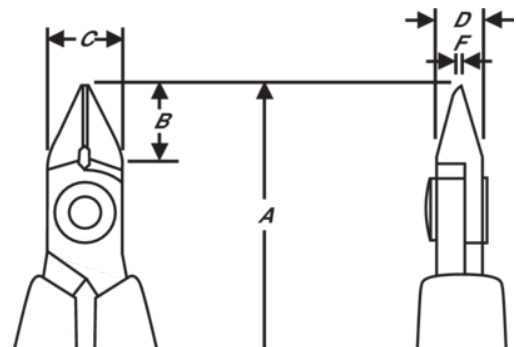

PRODUCT DETAILS

- Ideal for assembly work where access is a consideration
- Material: High performance alloy steel
- Polished and precision induction hardened to 63–65 HRC
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- ESD safe handles in synthetic material with leaf springs
- Cutting capacity is listed for solid copper wire



PRODUCT ATTRIBUTES

Product: **7190**

| | | | | | |
|---|------------|---|--------------|---|--------------|
|  | Tapered |  | XS |  | Micro-Bevel® |
|  | 0.2-1.0 mm |  | 0.00-0.04 in | A | 108 mm |
| A | 4.29 in | B | 9 mm | B | 0.35 in |
| C | 9 mm | C | 0.35 in | D | 6 mm |
| D | 0.24 inch | F | 1 mm | F | 0.04 in |
|  | 50 g | Ω | Dissipative | | |