




RX8155

**Ergo™ Ultra-Flush® Precision Cut
Diagonal Cutter with Tapered
Head 0.2-1.25 mm**







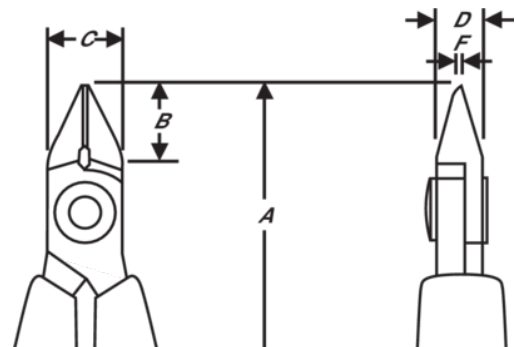



PRODUCT DETAILS

- Ideal for assembly work where accessibility is a consideration
- Developed according to the ERGO® process for a comfortable and effective grip in all situations
- Material: High performance alloy steel
- Precision induction hardened edges 63–65 HRC
- ESD safe handles in 2-component synthetic material
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Biospring® reduces tension throughout the working cycle of the tool and can be adjusted in three different positions
- Cutting capacity is listed for solid copper wire



PRODUCT ATTRIBUTES

Product: **RX8155**

	Tapered		M		Ultra-Flush®
	0.2-1.25 mm		0.01-0.05 in		
		A	138 mm	A	5.30 in
B	13 mm	B	0.51 in	C	12.5 mm
C	0.49 in	D	6 mm	D	0.24 inch
F	1.2 mm	F	0.05 in		71 g
Ω	Dissipative				