




8133-8165

Precision Diagonal Cutters with Tapered Head



PRODUCT DETAILS

- Ideal for assembly work where accessibility is a consideration
- Material: High performance alloy steel
- Exacting induction hardened edges 63–65 HRC
- ESD safe handles in synthetic material with leaf springs
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire

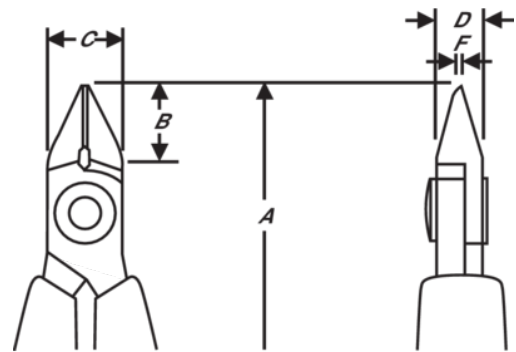

PRODUCT ATTRIBUTES

Product: 8133				
Tapered	XS	Micro-Bevel		
0.2-1.0 mm	0.008-0.04 in			
	A 108 mm	A 4.25 in		
B 8 mm	B 0.31 in	C 8 mm		
C 0.31 in	D 5 mm	D 0.2 inch		
F 0.8 mm	F 0.03 in	g 43 g		
Ω Dissipative				

Product: 8134				
Tapered	XS	Flush		
0.1-0.8 mm	0.004-0.03 in			
	A 108 mm	A 4.25 in		
B 8 mm	B 0.31 in	C 8 mm		
C 0.31 in	D 5 mm	D 0.2 inch		
F 0.8 mm	F 0.03 in	g 43 g		
Ω Dissipative				

Product: 8135				
Tapered	XS	Ultra-Flush		
0.1-0.5 mm	0.004-0.02 in			
	A 108 mm	A 4.25 in		
B 8 mm	B 0.31 in	C 8 mm		
C 0.31 in	D 5 mm	D 0.2 inch		
F 0.8 mm	F 0.03 in	g 43 g		
Ω Dissipative				

Product: 8143				
Tapered	S	Micro-Bevel		
0.2-1.25 mm	0.01-0.05 in			
	A 110 mm	A 4.33 in		
B 10.5 mm	B 0.41 in	C 8 mm		
C 0.39 in	D 6 mm	D 0.24 inch		
F 0.8 mm	F 0.03 in	g 46 g		
Ω Dissipative				

Product: 8144				
Tapered	S	Flush		
0.2-1.25 mm	0.01-0.05 in			
	A 110 mm	A 4.33 in		
B 10.5 mm	B 0.41 in	C 8 mm		
C 0.39 in	D 6 mm	D 0.24 inch		
F 0.8 mm	F 0.03 in	g 46 g		
Ω Dissipative				

Product: 8145				
Tapered	S	Ultra-Flush		
0.1-1.0 mm	0.00-0.04 in			
	A 110 mm	A 4.33 in		
B 10.5 mm	B 0.41 in	C 8 mm		
C 0.39 in	D 6 mm	D 0.24 inch		
F 0.8 mm	F 0.03 in	g 46 g		
Ω Dissipative				

Product: 8153				
Tapered	M	Micro-Bevel		
0.3-1.6 mm	0.01-0.06 in	0.2-0.6 mm		
0.01-0.02 in	A 112.5 mm	A 4.43 in		
B 13 mm	B 0.51 in	C 12.5 mm		
C 0.50 in	D 6 mm	D 0.24 inch		
F 1.2 mm	F 0.05 in	g 49 g		
Ω Dissipative				

Product: 8154				
Tapered	M	Flush		
0.2-1.6 mm	0.01-0.06 in			
	A 112.5 mm	A 4.43 in		
B 13 mm	B 0.51 in	C 12.5 mm		
C 0.50 in	D 6 mm	D 0.24 inch		
F 1.2 mm	F 0.05 in	g 49 g		
Ω Dissipative				

Product: 8155				
Tapered	M	Ultra-Flush		
0.2-1.25 mm	0.01-0.05 in			
	A 112.5 mm	A 4.43 in		
B 13 mm	B 0.51 in	C 12.5 mm		
C 0.50 in	D 6 mm	D 0.24 inch		
F 1.2 mm	F 0.05 in	g 49 g		
Ω Dissipative				

Product: 8163				
Tapered	L	Micro-Bevel		
0.4-2.0 mm	0.02-0.08 in	0.3-0.6 mm		
0.01-0.02 in	A 125 mm	A 4.92 in		
B 16 mm	B 0.63 in	C 16 mm		
C 0.63 in	D 8 mm	D 0.31 inch		
F 1.6 mm	F 0.06 in	g 88 g		
Ω Dissipative				

Product: 8164				
Tapered	L	Flush		
0.3-2.0 mm	0.01-0.08 in	0.3-0.6 mm		
0.01-0.02 in	A 125 mm	A 4.92 in		
B 16 mm	B 0.63 in	C 16 mm		
C 0.63 in	D 8 mm	D 0.31 inch		
F 1.6 mm	F 0.06 in	g 88 g		
Ω Dissipative				

Product: 8165				
Tapered	L	Ultra-Flush		
0.3-1.6 mm	0.01-0.06 in			
	A 125 mm	A 4.92 in		
B 16 mm	B 0.63 in	C 16 mm		
C 0.63 in	D 8 mm	D 0.31 inch		
F 1.6 mm	F 0.06 in	g 88 g		
Ω Dissipative				