




HS 8133-HS 8165
Long Precision Diagonal Cutters
with Tapered Head & ESD Safe
Handle



PRODUCT DETAILS





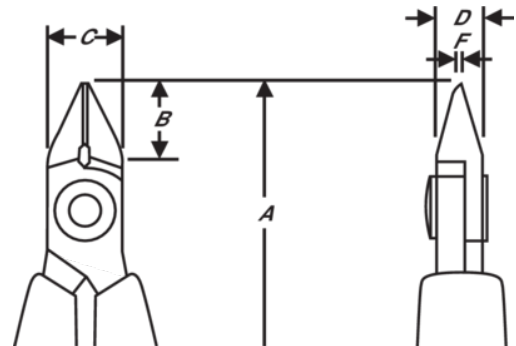



- Long, foam covered handles provide added leverage, an ergonomic grip, and reduced fatigue
- HS handle option can be applied to any standard 80 Series cutters or Supreme Series cutters and pliers

- All HS cutters and pliers are ESD safe, using static dissipative foam grips over conductive spring holders











PRODUCT ATTRIBUTES









Product: **HS8153**

	Tapered		M		Micro-Bevel®
	0.3–1.6 mm		0.01–0.06 in		0.2–0.6 mm
	0.01–0.02 in	A	144.8 mm	A	5.70 in
B	12.5 mm	B	0.5 in	C	12.5 mm
C	0.49 in	D	6 mm	D	0.24 inch
F	1.2 mm	F	0.05 in		97 g
Ω	Dissipative				









Product: **HS8154**

	Tapered		M		Flush
	0.2–1.6 mm		0.01–0.06 in		
		A	144.8 mm	A	5.70 in
B	12.5 mm	B	0.5 in	C	12.5 mm
C	0.49 in	D	6 mm	D	0.24 inch
F	1.2 mm	F	0.05 in		97 g
Ω	Dissipative				

Product: **HS8155**

	Tapered		M		Ultra-Flush®
	0.2–1.25 mm		0.01–0.05 in		
		A	144.8 mm	A	5.70 in
B	12.5 mm	B	0.5 in	C	12.5 mm
C	0.49 in	D	6 mm	D	0.24 inch
F	1.2 mm	F	0.05 in		97 g
Ω	Dissipative				

Product: **HS8165**

	Tapered		L		Ultra-Flush®
	0.3–1.6 mm		0.01–0.06 in		
		A	157.3 mm	A	6.19 in
B	16 mm	B	0.63 in	C	16 mm
C	0.63 in	D	8 mm	D	0.31 inch
F	1.6 mm	F	0.06 in		136 g
Ω	Dissipative				