




## BAH8156

**Micro-Bevel® Precision Cut  
Diagonal Cutter with Tapered &  
Relieved Head & ESD Safe  
Handle 0.3-1.25 mm**



### PRODUCT DETAILS

- Material: High performance alloy steel
- Exacting induction hardened edges 63–65 HRC
- ESD safe handles in synthetic material with leaf springs
- Precision screw joint that minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire

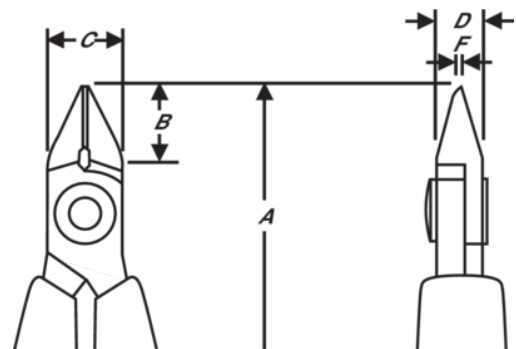

PRODUCT ATTRIBUTES

Product: **BAH8156**

|                                                                                   |                    |                                                                                   |              |                                                                                   |               |
|-----------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|---------------|
|  | Tapered & Relieved |  | M            | <b>A</b>                                                                          | 112.5 mm      |
| <b>A</b>                                                                          | 4.43 in            | <b>B</b>                                                                          | 12.5 mm      | <b>B</b>                                                                          | 0.5 in        |
| <b>C</b>                                                                          | 12.5 mm            | <b>C</b>                                                                          | 0.50 in      | <b>D</b>                                                                          | 6 mm          |
| <b>D</b>                                                                          | 0.24 inch          | <b>F</b>                                                                          | 1.2 mm       | <b>F</b>                                                                          | 0.05 in       |
|  | 0.3-1.25 mm        |  | 0.01-0.05 in |  | Micro-Bevel ® |
|  | 49 g               | <b>Ω</b>                                                                          | Dissipative  |                                                                                   |               |