




CO8140-CO8160
Precision Diagonal Cutters with
Oval Head & ESD Safe Handle







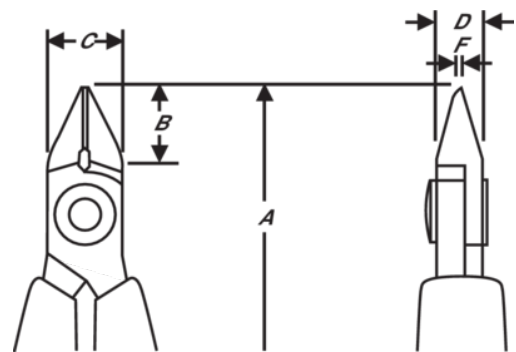

PRODUCT DETAILS

- Ideal for wire harness work and standard printed circuit board assembly
- High performance alloy steel
- Exacting induction hardened cutting edges 63–65 HRC
- ESD safe mono material handles in synthetic material with leaf springs
- Precision screw joint that minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire
- Phosphated finish









PRODUCT ATTRIBUTES

Product: CO8140

| | | | | | |
|---|-------------|---|--------------|---|--------------|
|  | Oval |  | S | A | 110.0 mm |
| A | 4.33 in | B | 10.5 mm | B | 0.41 in |
| C | 10 mm | C | 0.39 in | D | 6 mm |
| D | 0.24 inch | F | 0.8 mm | F | 0.03 in |
|  | 0.2-1.25 mm |  | 0.01-0.05 in |  | Micro-Bevel® |
|  | 46 g | Ω | Conductive | | |

Product: CO8160

| | | | | | |
|---|------------|---|--------------|---|--------------|
|  | Oval |  | L | A | 125.0 mm |
| A | 4.92 in | B | 16 mm | B | 0.63 in |
| C | 16 mm | C | 0.63 in | D | 8 mm |
| D | 0.31 inch | F | 1.6 mm | F | 0.06 in |
|  | 0.4-2.0 mm |  | 0.02-0.08 in |  | Micro-Bevel® |
|  | 88 g | Ω | Conductive | | |