




BAH8147-BAH8168

**Precision Diagonal Cutters with
Tapered Head & Relieved & ESD
Safe Handle**







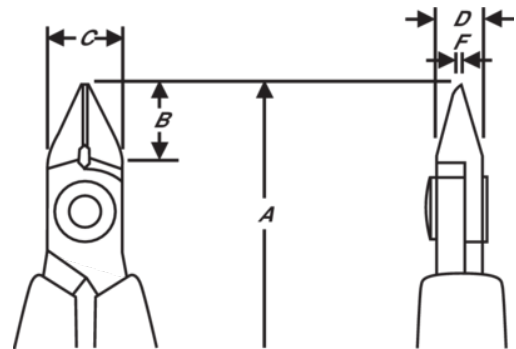


PRODUCT DETAILS

- Material: High performance alloy steel
- Exacting induction hardened edges 63–65 HRC
- ESD safe handles in synthetic material with leaf springs
- Precision screw joint that minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire










PRODUCT ATTRIBUTES








Product: BAH8147

	Tapered & Relieved		S	A	110.5 mm
A	4.33 in	B	10 mm	B	0.39 in
C	10 mm	C	0.39 in	D	6 mm
D	0.24 inch	F	0.8 mm	F	0.03 in
	0.1-1.0 mm		0.01-0.04 in		Flush
	46 g		Dissipative		








Product: BAH8156

	Tapered & Relieved		M	A	112.5 mm
A	4.43 in	B	12.5 mm	B	0.5 in
C	12.5 mm	C	0.50 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.3-1.25 mm		0.01-0.05 in		Micro-Bevel [®]
	49 g		Dissipative		








Product: BAH8157

	Tapered & Relieved		M	A	112.5 mm
A	4.43 in	B	12.5 mm	B	0.5 in
C	12.5 mm	C	0.50 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.2-1.25 mm		0.01-0.05 in		Flush
	49 g		Dissipative		








Product: BAH8158

	Tapered & Relieved		M	A	112.5 mm
A	4.43 in	B	12.5 mm	B	0.5 in
C	12.5 mm	C	0.50 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.2-1.0 mm		0.01-0.04 in		Ultra-Flush [®]
	49 g		Dissipative		

Product: BAH8167

	Tapered & Relieved		L	A	125.0 mm
A	4.92 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.3-1.5 mm		0.01-0.06 in		Flush
	52 g		Dissipative		

Product: BAH8168

	Tapered & Relieved		L	A	125.0 mm
A	4.92 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.3-1.25 mm		0.01-0.05 in		Ultra-Flush [®]
	51 g		Dissipative		