




## RX-8130

### Ergo™ Micro-Bevel® Precision Cut Diagonal Cutter with Oval Head 0.2-1 mm







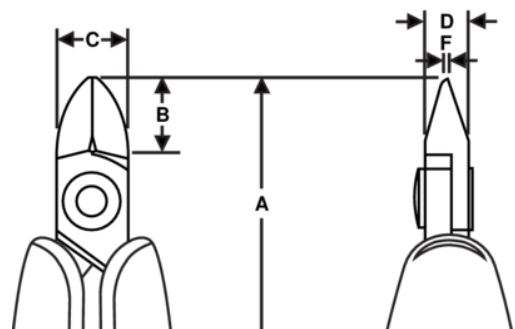

#### PRODUCT DETAILS

- Ideal for cutting leads, jewelry wire, and general assembly applications
- Two-component ESD safe Ergo™ handles: Thermoplastic surface on tough polypropylene provides superior grip
- Material: High performance alloy steel
- Precision induction hardened cutting edges 63–65 HRC
- Micro-Touch™: The shape of the handles makes it possible to control and rotate the pliers between thumb and index finger for precision work
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Biospring® reduces tension throughout the working cycle of the tool and can be adjusted in three different positions
- Cutting capacity is listed for solid copper wire
- Burnished finish



PRODUCT ATTRIBUTES

Product: **RX-8130**

|   |            |   |                |   |               |
|---|------------|---|----------------|---|---------------|
|  | Oval       |  | XS             | <b>A</b>  | 133.5 mm      |
| <b>A</b>  | 5.25 in    | <b>B</b>  | 8.5 mm         | <b>B</b>  | 0.33 in       |
| <b>C</b>  | 8 mm       | <b>C</b>  | 0.31 in        | <b>D</b>  | 5 mm          |
| <b>D</b>  | 0.2 inch   | <b>F</b>  | 0.8 mm         | <b>F</b>  | 0.03 in       |
|  | 0.2-1.0 mm |  | 0.00 - 0.04 in |  | Micro-Bevel ® |
|  | 68 g       | <b>Ω</b>  | Dissipative    |   |               |