




**RX-8140**

**Ergo™ Micro-Bevel® Precision  
Cut Diagonal Cutter with Oval  
Head 0.2-1.25 mm**



**PRODUCT DETAILS**

- Ideal for cutting leads, jewelry wire, and general assembly applications
- Two-component ESD safe Ergo™ handles: Thermoplastic surface on tough polypropylene provides superior grip
- Material: High performance alloy steel
- Precision induction hardened cutting edges 63–65 HRC
- Micro-Touch™: The shape of the handles makes it possible to control and rotate the pliers between thumb and index finger for precision work
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Biospring® reduces tension throughout the working cycle of the tool and can be adjusted in three different positions
- Cutting capacity is listed for solid copper wire
- Burnished finish

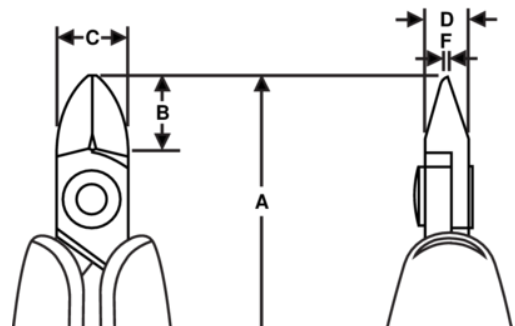

PRODUCT ATTRIBUTES

Product: **RX-8140**

|                                                                                   |             |                                                                                   |              |                                                                                   |               |
|-----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|---------------|
|  | Oval        |  | S            | <b>A</b>                                                                          | 135.5 mm      |
| <b>A</b>                                                                          | 5.33 in     | <b>B</b>                                                                          | 10.5 mm      | <b>B</b>                                                                          | 0.41 in       |
| <b>C</b>                                                                          | 10 mm       | <b>C</b>                                                                          | 0.39 in      | <b>D</b>                                                                          | 6 mm          |
| <b>D</b>                                                                          | 0.24 inch   | <b>F</b>                                                                          | 0.8 mm       | <b>F</b>                                                                          | 0.03 in       |
|  | 0.2-1.25 mm |  | 0.00-0.05 in |  | Micro-Bevel ® |
|  | 70 g        | <b>Ω</b>                                                                          | Dissipative  |                                                                                   |               |