




**RX-8161**

**Ergo™ Flush Precision Cut  
Diagonal Cutter with Oval Head  
0.3-2 mm**



## PRODUCT DETAILS

- Ideal for cutting leads, jewelry wire, and general assembly applications
- Two-component ESD safe Ergo™ handles: Thermoplastic surface on tough polypropylene provides superior grip
- Material: High performance alloy steel
- Precision induction hardened cutting edges 63–65 HRC
- Micro-Touch™: The shape of the handles makes it possible to control and rotate the pliers between thumb and index finger for precision work
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Biospring® reduces tension throughout the working cycle of the tool and can be adjusted in three different positions
- Cutting capacity is listed for solid copper wire
- Burnished finish

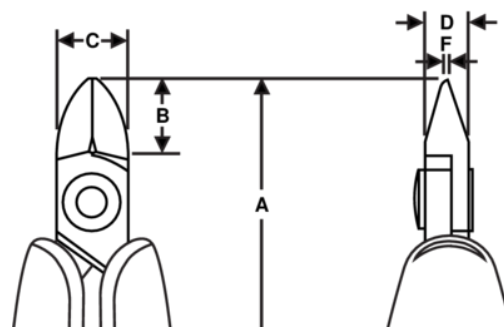

PRODUCT ATTRIBUTES

Product: **RX-8161**

|                                                                                   |            |                                                                                   |                |                                                                                   |          |
|-----------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------|----------|
|  | Oval       |  | L              | <b>A</b>                                                                          | 147.0 mm |
| <b>A</b>                                                                          | 5.80 in    | <b>B</b>                                                                          | 16 mm          | <b>B</b>                                                                          | 0.63 in  |
| <b>C</b>                                                                          | 16 mm      | <b>C</b>                                                                          | 0.63 in        | <b>D</b>                                                                          | 8 mm     |
| <b>D</b>                                                                          | 0.31 inch  | <b>F</b>                                                                          | 1.6 mm         | <b>F</b>                                                                          | 0.06 in  |
|  | 0.3-2.0 mm |  | 0.01 - 0.08 in |  | Flush    |
|  | 97 g       | <b>Ω</b>                                                                          | Dissipative    |                                                                                   |          |