




**RX8165**

**Ergo™ Ultra-Flush® Precision Cut  
Diagonal Cutter with Tapered  
Head 0.3-1.6 mm**







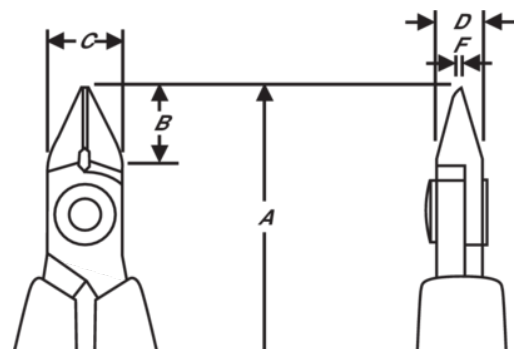

**PRODUCT DETAILS**

- Ideal for assembly work where accessibility is a consideration
- Developed according to the ERGO® process for a comfortable and effective grip in all situations
- Material: High performance alloy steel
- Precision induction hardened edges 63–65 HRC
- ESD safe handles in 2-component synthetic material
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Biospring® reduces tension throughout the working cycle of the tool and can be adjusted in three different positions
- Cutting capacity is listed for solid copper wire



PRODUCT ATTRIBUTES

Product: **RX8165**

	Tapered		L	<b>A</b>	147.0 mm
<b>A</b>	5.80 in	<b>B</b>	16 mm	<b>B</b>	0.63 in
<b>C</b>	16 mm	<b>C</b>	0.63 in	<b>D</b>	8 mm
<b>D</b>	0.31 inch	<b>F</b>	1.6 mm	<b>F</b>	0.06 in
	0.3-1.6 mm		0.01-0.06 in		Ultra-Flush ®
	95 g	<b>Ω</b>	Dissipative		