

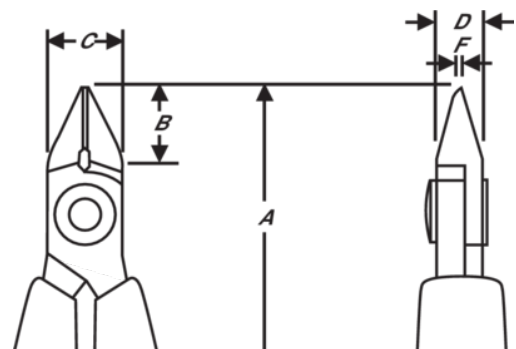


RX-8133-RX-8165
ERGO™ Precision Diagonal
Cutters with Tapered Head









PRODUCT DETAILS

- Ideal for assembly work where accessibility is a consideration
- Developed according to the ERGO® process for a comfortable and effective grip in all situations
- Material: High performance alloy steel
- Precision induction hardened edges 63–65 HRC
- ESD safe handles in 2-component synthetic material
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Biospring® reduces tension throughout the working cycle of the tool and can be adjusted in three different positions
- Cutting capacity is listed for solid copper wire









PRODUCT ATTRIBUTES







Product: RX-8133

	Tapered		XS	A	108.0 mm
A	4.25 in	B	8 mm	B	0.31 in
C	8 mm	C	0.31 in	D	5 mm
D	0.2 inch	F	0.8 mm	F	0.03 in
	0.2-1.0 mm		0.008-0.04 in		Micro-Bevel®
g	66 g		Dissipative		







Product: RX-8134

	Tapered		XS	A	108.0 mm
A	4.25 in	B	8 mm	B	0.31 in
C	8 mm	C	0.31 in	D	5 mm
D	0.2 inch	F	0.8 mm	F	0.03 in
	0.1-0.8 mm		0.004-0.03 in		Flush
g	66 g		Dissipative		







Product: RX-8143

	Tapered		S	A	135.5 mm
A	5.25 in	B	10.5 mm	B	0.41 in
C	8 mm	C	0.39 in	D	6 mm
D	0.24 inch	F	0.8 mm	F	0.03 in
	0.2-1.25 mm		0.01-0.05 in		Micro-Bevel®
g	68 g		Dissipative		







Product: RX-8144

	Tapered		S	A	135.5 mm
A	5.25 in	B	10.5 mm	B	0.41 in
C	8 mm	C	0.39 in	D	6 mm
D	0.24 inch	F	0.8 mm	F	0.03 in
	0.1-1.25 mm		0.00-0.05 in		Flush
g	68 g		Dissipative		







Product: RX-8145

	Tapered		S	A	135.5 mm
A	5.25 in	B	10.5 mm	B	0.41 in
C	8 mm	C	0.39 in	D	6 mm
D	0.24 inch	F	0.8 mm	F	0.03 in
	0.1-1.0 mm		0.00-0.04 in		Ultra-Flush®
g	68 g		Dissipative		







Product: RX8153

	Tapered		M	A	138.0 mm
A	5.30 in	B	13 mm	B	0.51 in
C	12.5 mm	C	0.49 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.3-1.6 mm		0.01-0.06 in		Micro-Bevel®
g	71 g		Dissipative		







Product: RX8154

	Tapered		M	A	138.0 mm
A	5.30 in	B	13 mm	B	0.51 in
C	12.5 mm	C	0.49 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.2-1.6 mm		0.01-0.06 in		Flush
g	71 g		Dissipative		







Product: RX-8163

	Tapered		L	A	147.0 mm
A	5.80 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.4-2.0 mm		0.02-0.08 in		Micro-Bevel®
g	95 g		Dissipative		

Product: RX-8164

	Tapered		L	A	147.0 mm
A	5.80 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.3-2.0 mm		0.01-0.08 in		Flush
g	95 g		Dissipative		

Product: RX8165

	Tapered		L	A	147.0 mm
A	5.80 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.3-1.6 mm		0.01-0.06 in		Ultra-Flush®
g	95 g		Dissipative		