




## HS-7280

### Long Flush Precision Cut Reverse Angle Oblique Cutter 0.2 mm-0.8 mm



#### PRODUCT DETAILS

- Long, foam covered handles provide added leverage, an ergonomic grip, and reduced fatigue
- HS handle option can be applied to any standard 80 Series cutters or Supreme Series cutters and pliers
- All HS cutters and pliers are ESD safe, using static dissipative foam grips over conductive spring holders
- Contact Lindström for additional options

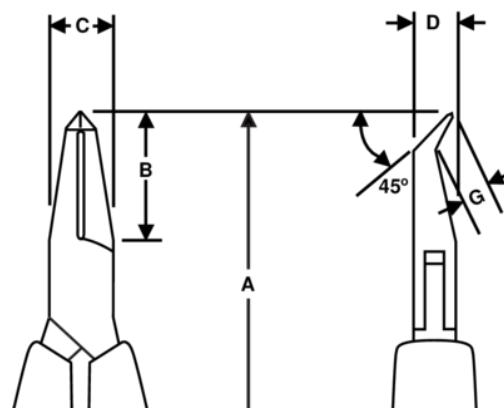

PRODUCT ATTRIBUTES

Product: **HS-7280**

|                                                                                   |            |                                                                                   |              |                                                                                   |          |
|-----------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|----------|
|  | Angle 45°  |  | S            | <b>A</b>                                                                          | 150.3 mm |
| <b>A</b>                                                                          | 5.91 in    | <b>B</b>                                                                          | 18 mm        | <b>B</b>                                                                          | 0.71 in  |
| <b>C</b>                                                                          | 9 mm       | <b>C</b>                                                                          | 0.35 in      | <b>D</b>                                                                          | 6 mm     |
| <b>D</b>                                                                          | 0.24 inch  | <b>G</b>                                                                          | 3.5 mm       | <b>G</b>                                                                          | 0.14 in  |
|  | 0.2-0.8 mm |  | 0.01-0.03 in |  | Flush    |
|  | 102 g      | <b>Ω</b>                                                                          | Dissipative  |                                                                                   |          |