




CO8133-CO8165

**Precision Diagonal Cutters with
Tapered Head**







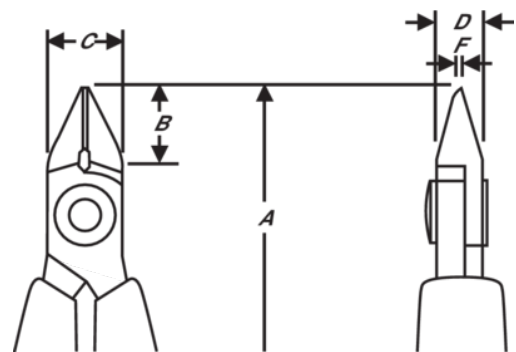

PRODUCT DETAILS

- Ideal for assembly work where accessibility is a consideration
- Material: High performance alloy steel
- Exacting induction hardened edges 63–65 HRC
- ESD safe handles in synthetic material with leaf springs
- Precision screw joint minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire









PRODUCT ATTRIBUTES







Product: CO8154

	Tapered		M	A	112.5 mm
A	4.43 in	B	13 mm	B	0.51 in
C	12.5 mm	C	0.50 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.2-1.6 mm		0.01-0.06 in		Flush
	49 g	Ω	Conductive		

Product: CO8163

	Tapered		L	A	125.0 mm
A	4.92 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.4-2.0 mm		0.02-0.08 in		Micro-Bevel [®]
	88 g	Ω	Conductive		

Product: CO8165

	Tapered		L	A	125.0 mm
A	4.92 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.3-1.6 mm		0.01-0.06 in		Ultra-Flush [®]
	88 g	Ω	Conductive		