




## 7154TC2

### Flush Precision Cut Carbide Diagonal Cutter with Tapered and Relieved Head for Hard Materials 0.1-0.4 mm / 0.004-0.2 in



#### PRODUCT DETAILS

- Carbide Insert Cutters suitable for hard wire materials such as Nitinol, Stainless Steel, Platinum and Titanium
- High performance alloy steel material provides strength and reliability
- Precision lap joint with screw minimizes friction while maximizing cutting edge and tip alignment
- ESD Safe, comfortable synthetic handles with return spring for smooth operation
- Polished, natural finish provides protection against oxidation
- Cutting capacity hard wire from 0.1 mm to 0.4 mm / 0.004 in - 0.02 in
- For reconditioning or exchange requests, a minimum order quantity of 20 units is required.

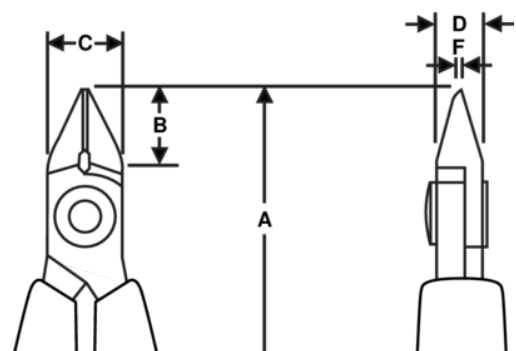

PRODUCT ATTRIBUTES

Product: **7154TC2**

|                                                                                   |                    |                                                                                   |               |                                                                                   |          |
|-----------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------|----------|
|  | Tapered & Relieved |  | M             |  | Flush    |
|  | 0.1-0.4 mm         |  | 0.004-0.02 in | <b>A</b>                                                                          | 112.5 mm |
| <b>A</b>                                                                          | 4.43 in            | <b>B</b>                                                                          | 13 mm         | <b>B</b>                                                                          | 0.51 in  |
| <b>C</b>                                                                          | 12.5 mm            | <b>C</b>                                                                          | 0.49 in       | <b>D</b>                                                                          | 6 mm     |
| <b>D</b>                                                                          | 0.24 inch          | <b>F</b>                                                                          | 2 mm          | <b>F</b>                                                                          | 0.08 in  |
|  | 50 g               |                                                                                   |               |                                                                                   |          |